

GOVERNO DO ESTADO DE RONDONIA  
Superintendência Estadual de Compras e Licitações

**Pregão nº 4212021**

**Modo de Disputa:** Aberto

**Objeto:** Aquisição de Equipamento de TI (switch) para atender as necessidades das unidades da Polícia Militar do Estado de Rondônia.

**Data de abertura inicial:** 10/09/2021 10:00 (horário de Brasília)

**Fornecedor:** 18.516.766/0001-99 - G PARTNER TECNOLOGIA EIRELI

**DOCUMENTOS DE PROPOSTA/HABILITAÇÃO**

Anexo	Tipo	Enviado em:
<a href="#">PROPOSTA.pdf</a>	Proposta	09/09/2021 17:02
<a href="#">1-Habilitação.pdf</a>	Habilitação	09/09/2021 17:03

**ANEXOS DO ITEM**

**Item:** 1 - Switch

**Tratamento Diferenciado:** Tipo I - Participação Exclusiva de ME/EPP/Equiparada

Anexo/Planilha	Enviado em:
<a href="#">PROPOSTA.pdf</a>	29/09/2021 11:02

Fechar

**A**  
**SUPERINTENDÊNCIA ESTADUAL DE LICITAÇÕES - SUPEL/RO**

**PREGÃO ELETRÔNICO Nº: 421/2021/SUPEL/RO**  
**Processos nº 0021.110664/2021-71**

**Objeto:** Aquisição de Equipamento de TI (switch) para atender as necessidades das unidades da Polícia Militar do Estado de Rondônia.

**PROPOSTA COMERCIAL**

**Razão Social: G PARTNER TECNOLOGIA EIRELI**

**CNPJ:** 18.516.766/0001-99 – **I.E:** 254162171111 - **I.M:** 21.709

**Endereço:** Vela um, nº 26 - Km 89,5, Verde Mar - Caraguatatuba – SP - CEP 11677-249 - Caraguatatuba – SP - CEP 11677-249

**Telefone:** (12)3384-1685 - **e-mail:** licitacao@gpartnertec.com.br

**Dados bancários: Banco:** Banco do Brasil – AG 1476-1 – C.C. 33124-4

ITEM	DESCRIÇÃO DO OBJETO	VALOR UNITÁRIO	QTE. TOTAL	VALOR FINAL
01	<b>SWITCH GERENCIÁVEL 24 Portas – PoE</b> • Switch Avançado Com Gerenciamento Inteligente Gigabit De 24 Portas Poe Com Alimentação Econômica Poe 193W e 4 Portas Gbe Sfp; • Portas: 24 Portas Poe+ 10/100/1000 Rj-45 com negociação automática, 4 Portas SFP 1000 Mbps, suporta 24 Portas 10/100/1000 com detecção automática e mais 4 Portas SFP 1000base-X, • Memória e Processador Mbps a 500 Mhz 32 Mb de Flash, Tamanho do buffer de pacotes: 4,1 Mbs de ram de 128 Mb; Latência De 100 Mb: < 5 µS; Latência De 1000 Mb: < 5 µS; Capacidade de Produção de Até 41,7 Mpps; • Capacidade de Routing/Switching 56 Gbps; • Poe de fonte de alimentação 193 W Poe+; • Características De Gestão: Interface de Gerenciamento via Navegador Web; Dimensões: Com os suporte para se encaixar nos racks de 1U.  <b>Marca:</b> D-Link <b>Modelo:</b> DGS-1210-28P	R\$ 3.038,00 (três mil e trinta e oito reais)	10	R\$ 30.380,00 (trinta mil trezentos e oitenta reais)

**Prazo de validade da proposta de preços: mínimo de 60 (sessenta) dias contados da data de abertura da sessão pública.**

Esta proposta inclui todos os custos diretos e indiretos, bem como encargos, benefícios, despesas indiretas (BDI) e demais despesas de qualquer natureza, assim como a abarca a condição de que o preço ofertado permanecerá fixo e irrevogável.

Declaramos que estamos de pleno acordo com todas as condições estabelecidas no Edital e seus anexos, bem como aceitamos todas as obrigações e responsabilidades especificadas no Termo de Referência.

Caso nos seja adjudicado o objeto da licitação, comprometemos a assinar o Contrato no prazo determinado no documento de convocação, e para esse fim fornecemos os dados em anexo.

29 de Setembro de 2021

**G PARTNER TECNOLOGIA EIRELI**  
Gabriela Sampaio Queiroz  
431.214.828-74  
37.138.488-6  
Sócia Gerente

**18.516.766/0001-99**  
**G PARTNER TECNOLOGIA EIRELI**  
Vela um, nº 26 - Km 89,5, Verde Mar  
Caraguatatuba – SP - CEP 11677-249

**A**  
**SUPERINTENDÊNCIA ESTADUAL DE LICITAÇÕES - SUPEL/RO**

**Ref.:** PREGÃO ELETRÔNICO Nº: 421/2021/SUPEL/RO  
**Processos nº 0021.110664/2021-71**

**OBJETO:** Aquisição de Equipamento de TI (switch) para atender as necessidades das unidades da Polícia Militar do Estado de Rondônia.

**Dados do licitante:**

RAZÃO SOCIAL: G PARTNER TECNOLOGIA EIRELI  
CNPJ: 18.516.766/0001-99  
I.E: 254.162.171.111  
I.M: 21.709  
END.: Viela um, nº 26 - Km 89,5, Verde Mar - Caraguatatuba – SP - CEP 11677-249  
Fone: (12) 3884-1685  
e-mail: [licitacao@gpartnertec.com.br](mailto:licitacao@gpartnertec.com.br)  
Contatos: Gabriela Sampaio / Guilherme Augusto

**Responsável pela Assinatura do Contrato:**

Nome: Gabriela Sampaio Queiroz  
RG: 37.134.488-6 SSP/SP  
CPF: 431.214.828-74  
Cargo: Sócia Gerente  
Nacionalidade: Brasileira  
Estado Civil: Solteira

**Dados Bancários:**

Banco: Banco do Brasil (001)  
Agencia: 1741-8 - Caraguatatuba  
Conta Corrente: 34717-5

29 de Setembro de 2021

**18.516.766/0001-99**

  
G PARTNER TECNOLOGIA EIRELI  
Gabriela Sampaio Queiroz  
431.214.828-74  
37.138.488-6  
Sócia Gerente

**G PARTNER TECNOLOGIA EIRELI**

Viela um, nº 26 - Km 89,5, Verde Mar  
Caraguatatuba – SP - CEP 11677-249

## Highlights

### Easy Management

A multilingual Web UI, a compact CLI, and a variety of management features allow the switches to integrate with your existing network

### IPv6 Ready

IPv6 compliance means that the switches are ready to meet future addressing standards, and are compatible with both your IPv4 and IPv6 network

### Power over Ethernet

Increased PoE capability and support for IEEE 802.3af/at allow the PoE models in the series to power more devices with greater port density



## DGS-1210 Series

# Smart Managed Switches

## Features

### Green Technology

- Link status detection
- Port shut-off
- System hibernation
- Time-based PoE (PoE models only)

### Security Features

- Access Control Lists (ACLs)
- D-Link Safeguard Engine helps the CPU resist broadcast/multicast/unicast flooding
- Port Security supports up to 64 MAC addresses per port
- ARP Spoofing Prevention
- Smart Binding

### Intuitive Management

- D-Link Network Assistant (DNA) utility or multi-lingual Web UI
- Built-in SNMP MIB for remote NMS (D-View 7.0)
- Compact Command Line Interface (CLI) through Telnet

### Advanced Features

- Static routing
- Surveillance Mode
- Auto Voice VLAN
- Dual software images
- Dual configuration files

The D-Link DGS-1210 Series Smart Managed Switches are the latest generation of switches to provide increased Power over Ethernet (PoE) output, a range of physical interface types, multiple management interfaces, and advanced Layer 2 features. With all of these features combined, the DGS-1210 Series provides a cost-efficient and flexible solution for expanding any business network.

## Seamless Integration

The DGS-1210 Series includes a wide range of port and media types, including 10/100/1000BASE-T RJ-45 ports, 100/1000 Mbps combo ports, and 100/1000 Mbps SFP ports. The DGS-1210-10, DGS-1210-26, DGS-1210-10P, and DGS-1210-10MP models feature 2 100/1000 Mbps SFP ports, while all other DGS-1210 Series models feature 4 GbE/SFP combo ports, allowing you to choose the most suitable media type for your requirements. All DGS-1210 Series PoE switches include support for IEEE 802.3af/at and higher power budgets, allowing more PoE devices to be powered by the switch and for devices to be installed in remote locations without immediate access to power outlets.

## Advanced Features

The DGS-1210 Series comes equipped with a complete lineup of L2 features, including IGMP snooping, port mirroring, Spanning Tree Protocol (STP), and Link Aggregation Control Protocol (LACP). The IEEE 802.3x Flow Control function allows servers to directly connect to the switch for fast, reliable data transfers. The DGS-1210 Series also supports advanced features such as static routes, which allow network administrators to divide the network into VLANs, increasing network efficiency. Network maintenance features include loopback detection and cable diagnostics. Loopback detection significantly speeds up troubleshooting by automatically detecting and shutting down switching loops. The cable diagnostics feature, designed primarily for administrators and customer service representatives, determines the cable quality and quickly discovers errors, allowing for hassle-free diagnostics and maintenance.

### Automatic Configuration

The DGS-1210 Series supports Auto Voice VLAN and Surveillance Mode, which allows voice and video traffic to be automatically identified and handled differently than regular network traffic. Auto Voice VLAN detects Voice over IP (VoIP) traffic and automatically segments it from the rest of the network, adding a layer of isolation and allowing Quality of Service (QoS) to be applied. Surveillance Mode detects compatible ONVIF cameras and places them in a surveillance VLAN, allowing a single switch to be used for voice, video, and data, removing the need for dedicated hardware and reducing maintenance costs. Surveillance Mode also includes its own Web UI, making surveillance features easily accessible and simplifying management of your surveillance network.


### Advanced Access Control

D-Link's innovative Safeguard Engine helps to protect the switches against traffic flooding caused by malicious attacks. The DGS-1210 Series supports 802.1X port-based authentication, allowing the clients to be authenticated through external RADIUS servers. The Access Control List (ACL) feature helps to enhance network security and helps to protect the internal IT network. The DGS-1210 Series also features Address Resolution Protocol (ARP) spoofing prevention, which helps to provide protection from attacks on the network that could allow an intruder to sniff data frames, modify traffic, or bring traffic to a halt altogether by sending fake ARP messages. To help prevent ARP spoofing attacks, the switch uses packet control ACLs to block invalid packets that contain fake ARP messages. The DHCP server screening feature filters DHCP replies on unauthorized ports to prevent them from being assigned an IP address.

### Versatile Management

The DGS-1210 Series comes with the D-Link Network Assistant (DNA) utility that enables administrators to remotely control their network down to the port level. The D-Link Network Assistant utility furthermore allows customers to easily discover multiple D-Link Smart Managed Switches within the same L2 network segment and display them on-screen for instant access. With this utility, users do not need to change the IP address of their PC. This allows for simultaneous configuration and setup of all discovered devices, including password changes and firmware upgrades. The DGS-1210 Series also supports D-View 7.0 and Command Line Interface (CLI) through Telnet. D-View 7.0 is a network management system that allows for the central management of network assets, remote configuration, and logging functions.

Surveillance Topology Web Interface Screenshot

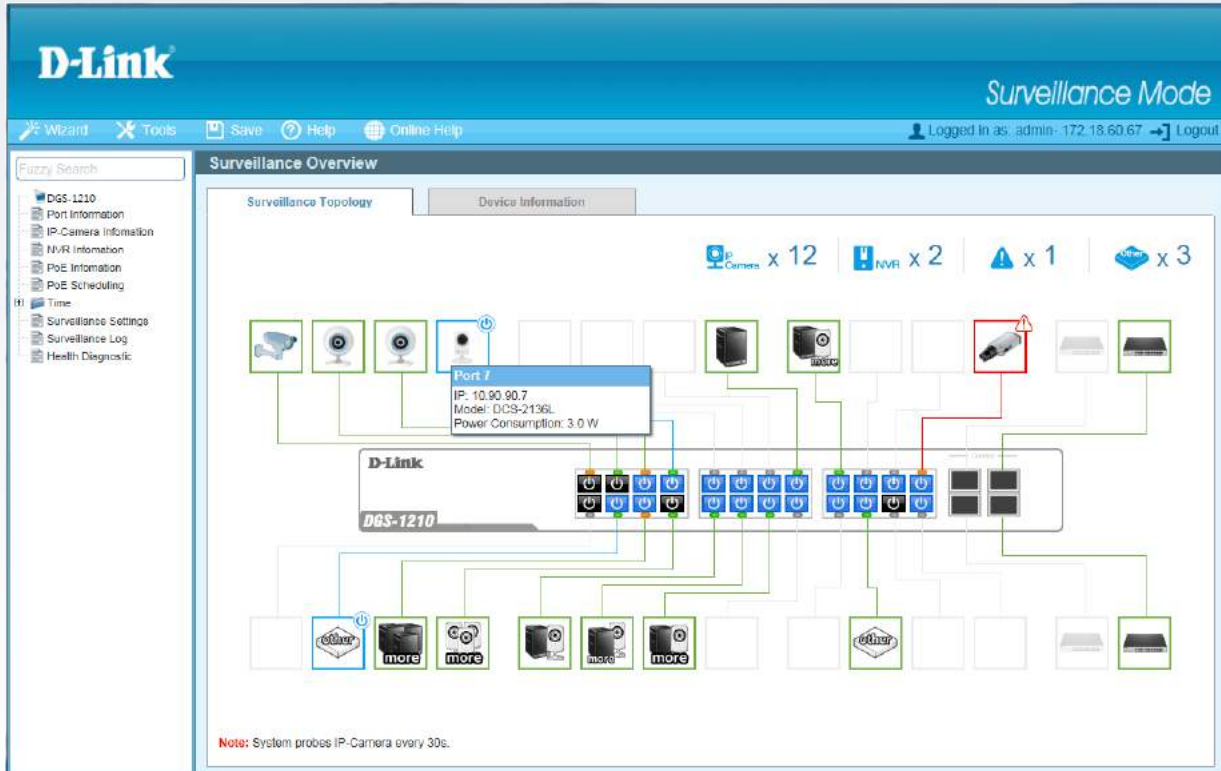

D-Link Network Assistant (DNA) Screenshot

Default Workspace (Online / Offline: 15 / 0)

Type / Status	Auth.	System Name	IP Address	MAC	Model	SNMP	FW Ver.	SN	System Time	IP Mode	HW Ver.	Protocol Ver.
Switch			172.18.190.210	00-00-15-10-02-06	DGS-1510-20	1.20.011			2009/01/04 02:08:08	Static	A1	DDP V2.0.25
DGS-1210-08			172.17.7.15	c2-18-8b-0b-af-c3	DGS-1210-08	1.12	sn123456		2012/01/17 00:40:11	DHCP	A1	DDP V2.0.25
DGS-1210-52P/ME			172.17.6.153	28-10-8b-0b-ab-c3	DGS-1210-52P/ME	1.12	sn123456		2012/01/17 00:40:11	DHCP	A1	DDP V2.0.25
DGS-1210-20/ME			172.17.5.135	26-10-7b-0b-9d-95	DGS-1210-20/ME	1.06	sn123456		2013/01/14 15:37:00	DHCP	B1	DDP V2.0.25
DGS-1210-28X/ME			182.17.7.16	22-18-8b-0b-ef-83	DGS-1210-28X/ME	1.12	sn123456		2012/01/17 00:40:11	DHCP	C1	DDP V2.0.25
DGS-1210-20P/ME			172.17.7.153	28-18-8b-0b-ab-c3	DGS-1210-20P/ME	1.12	sn123456		2012/01/17 00:40:11	DHCP	A1	DDP V2.0.25
DGS-1210-10			172.17.7.113	28-18-8b-0b-ef-c3	DGS-1210-10	1.12	sn123456		2012/01/17 00:40:11	DHCP	B1	DDP V2.0.25
			172.18.190.199	1c-7e-45-29-ad-07	DGS-1500-20	2.50.008	08H91BC000001		2012/01/08 08:55:41	Static	A1	DDP V2.0.24
DGS-1210-52/ME			172.17.5.153	28-10-7b-0b-ab-c3	DGS-1210-52/ME	1.12	sn123456		2012/01/17 00:40:11	DHCP	A1	DDP V2.0.25
DGS-1210-10P/ME			172.17.5.135	10-7d-58-0f-e4-d6	DGS-1210-10P/ME	0.3.0.0	sn123456		2013/07/30 19:20:09	DHCP	B1	DDP V2.0.25
DGS-1210-20			172.17.7.111	a9-18-8b-0b-af-c3	DGS-1210-20	1.12	sn123456		2012/01/17 00:40:11	DHCP	A1	DDP V2.0.25
DGS-1210-52			172.17.7.11	82-18-8b-0b-ef-c3	DGS-1210-52	1.12	sn123456		2012/01/17 00:40:11	DHCP	B1	DDP V2.0.25

Technical Specifications					
Model Number	• DGS-1210-10	• DGS-1210-20	• DGS-1210-26	• DGS-1210-28	• DGS-1210-52
Hardware Version	• F1				
General					
Interfaces	• 8 x 10/100/1000BASE-T • 2 x 100/1000 Mbps SFP ports	• 16 x 10/100/1000BASE-T • 4 x 100/1000 Mbps GbE/SFP combo ports	• 24 x 10/100/1000BASE-T • 2 x 100/1000 Mbps SFP ports	• 24 x 10/100/1000BASE-T • 4 x 100/1000 Mbps GbE/SFP combo ports	• 48 x 10/100/1000BASE-T • 4 x 100/1000 Mbps GbE/SFP combo ports
Port Standards	<ul style="list-style-type: none"> <li>• IEEE 802.3 10BASE-T Ethernet (twisted-pair copper)</li> <li>• IEEE 802.3u 100BASE-TX Fast Ethernet (twisted-pair copper)</li> <li>• IEEE 802.3u 100BASE-FX 100 Mbps over fiber optic</li> <li>• IEEE 802.3ab 1000BASE-T Gigabit Ethernet (twisted-pair copper)</li> <li>• IEEE 802.3z 1000BASE-X 1 Gbps over fiber optic</li> <li>• IEEE 802.3az Energy Efficient Ethernet (EEE)</li> <li>• IEEE 802.3x Flow Control</li> </ul>				
Network Cables	• UTP Cat. 5, Cat. 5e (100 m max.)				
Duplex Mode	<ul style="list-style-type: none"> <li>• Full/Half-duplex for 10/100 Mbps</li> <li>• Full-duplex for 1000 Mbps</li> </ul>				
Media Interface Exchange	• Auto MDI/MDIX adjustment for all twisted-pair ports				
Performance					
Switching Capacity	• 20 Gbps	• 40 Gbps	• 52 Gbps	• 56 Gbps	• 104 Gbps
Transmission Method	• Store-and-forward				
MAC Address Table	• 8K entries				• 16K entries
Static MAC Addresses	• 256 entries				
Maximum 64 Byte Packet Forwarding Rate	• 14.88 Mpps	• 29.8 Mpps	• 38.7 Mpps	• 41.7 Mpps	• 77.4 Mpps
Packet Buffer Memory	• 4.1 Mbits	• 4.1 Mbits	• 4.1 Mbits	• 4.1 Mbits	• 12 Mbits
CPU Memory	• DDR3 128 MB				
Flash Memory	• 32 MB				
LEDs					
Power (per device)	✓				
Link/Active/Speed (per port)	✓				
Physical/Environmental					
Power Input	• 100 to 240 V AC 50/60 Hz internal universal power supply				
Maximum Power Consumption	• 6.31 W/100 V • 6.33 W/240 V	• 13.08 W/100 V • 13.02 W/240 V	• 15.22 W/100 V • 15.11 W/240 V	• 17.32 W/100 V • 16.94 W/240 V	• 34.85 W/100 V • 34.2 W/240 V
Standby Power Consumption	• 2.03 W/100 V • 2.07 W/240 V	• 5.47 W/100 V • 5.56 W/240 V	• 5.01 W/100 V • 5.06 W/240 V	• 6.49 W/100 V • 6.55 W/240 V	• 13.7 W/100 V • 13.9 W/240 V
Acoustics	• 0 dB(A)	• 0 dB(A)	• 0 dB(A)	• 0 dB(A)	• 0 dB(A)
Heat Dissipation	• 21.53 BTU/hr (100V) • 21.59 BTU/hr (240V)	• 44.62 BTU/hr (100V) • 44.41 BTU/hr (240V)	• 51.93 BTU/hr (100V) • 51.57 BTU/hr (240V)	• 59.09 BTU/hr (100V) • 57.79 BTU/hr (240V)	• 118.92 BTU/hr (100V) • 116.7 BTU/hr (240V)
Operating Temperature	• -5 to 50°C				

Storage Temperature	• -20 to 70°C				
Operating Humidity	• 0% to 95% relative humidity				
Storage Humidity	• 0% to 95% relative humidity				
Dimensions (L x W x H)	• 280 x 126 x 44 mm (11.02 x 4.96 x 1.73 in)	• 280 x 180 x 44 mm (11.02 x 7.09 x 1.73 in)	• 440 x 140 x 44 mm (17.32 x 5.51 x 1.73 in)	• 440 x 140 x 44 mm (17.32 x 5.51 x 1.73 in)	• 440 x 210 x 44 mm (17.32 x 8.27 x 1.73 in)
Weight	• 0.98 kg (2.16 lbs)	• 1.75 kg (3.86 lbs)	• 2.06 kg (4.54 lbs)	• 2.15 kg (4.74 lbs)	• 3.46 kg (7.63 lbs)
Certifications	<ul style="list-style-type: none"> <li>• EMI: CE Class A, VCCI Class A, FCC Class A, BSMI, CCC</li> <li>• Safety: CB, UL, BSMI, CCC</li> </ul>				
MTBF	• 1,380,058 hours	• 1,087,100 hours	• 1,082,534 hours	• 992,594 hours	• 400,667 hours



**Technical Specifications**

Model	• DGS-1210-10P	• DGS-1210-10MP	• DGS-1210-28P	• DGS-1210-28MP	• DGS-1210-52MP
Hardware Version	• F1				
<b>General</b>					
Interfaces	• 8 10/100/1000BASE-T PoE • 2 100/1000 Mbps SFP ports	• 8 10/100/1000BASE-T PoE • 2 100/1000 Mbps SFP ports	• 24 10/100/1000BASE-T PoE • 4 100/1000 Mbps GbE/SFP combo ports	• 24 10/100/1000BASE-T PoE • 4 100/1000 Mbps GbE/SFP combo ports	• 48 10/100/1000BASE-T PoE • 4 100/1000 Mbps GbE/SFP combo ports
Port Standards	<ul style="list-style-type: none"> <li>• IEEE 802.3 10BASE-T Ethernet (twisted-pair copper)</li> <li>• IEEE 802.3u 100BASE-TX Fast Ethernet (twisted-pair copper)</li> <li>• IEEE 802.3u 100BASE-FX 100 Mbps over fiber optic</li> <li>• IEEE 802.3ab 1000BASE-T Gigabit Ethernet (twisted-pair copper)</li> <li>• IEEE 802.3z 1000BASE-X 1 Gbps over fiber optic</li> <li>• IEEE 802.3az Energy Efficient Ethernet (EEE) <ul style="list-style-type: none"> <li>• IEEE 802.3x Flow Control</li> </ul> </li> <li>• IEEE 802.3af/at compliance (for PoE ports)</li> </ul>				
Network Cables	• UTP Cat. 5, Cat. 5e (100 m max.)				
Duplex Mode	<ul style="list-style-type: none"> <li>• Full/Half-duplex for 10/100 Mbps</li> <li>• Full-duplex for 1000 Mbps</li> </ul>				
Media Interface Exchange	• Auto MDI/MDIX adjustment for all twisted-pair ports				
<b>Performance</b>					
Switching Capacity	• 20 Gbps	• 20 Gbps	• 56 Gbps	• 56 Gbps	• 104 Gbps
Transmission Method	• Store-and-forward				
MAC Address Table	• 8K entries				• 16K entries
Static MAC Addresses	• 256 entries				
Maximum 64 Byte Packet Forwarding Rate	• 14.88 Mpps	• 14.88 Mpps	• 41.7 Mpps	• 41.7 Mpps	• 77.4 Mpps
Packet Buffer Memory	• 4.1 Mbits	• 4.1 Mbits	• 4.1 Mbits	• 4.1 Mbits	• 12 Mbits
CPU Memory	• DDR3 128 MB				
Flash Memory	• 32 MB				
<b>PoE</b>					
PoE Capable Ports	• Ports 1 to 8		• Ports 1 to 24		• Ports 1 to 48
Power Budget	• 65 W	• 130 W	• 193 W	• 370 W	• 370 W
<b>LEDs</b>					
Power (per device)	✓	✓	✓	✓	✓
Link/Active/Speed (per port)	✓	✓	✓	✓	✓
PWR Max	✓	✓	✓	✓	✓
Fan Error	• N/A	• N/A	✓	✓	✓

Physical/Environmental					
Power Input	• 54.0 V DC external power adapter	• 100 to 240 V AC 50/60 Hz internal universal power supply			
Maximum Power Consumption (PoE enabled)	• 81.9 W/100 V • 80.6 W/240 V	• 152.3 W/100 V • 148.7 W/240 V	• 263.9 W/100 V • 247.4 W/240 V	• 446.1 W/100 V • 424.8 W/240 V	• 478.9 W/100 V • 454.1 W/240 V
Maximum Power Consumption (PoE disabled)	• 7.6 W/100 V • 7.5 W/240 V	• 8.5 W/100 V • 9.4 W/240 V	• 30.6 W/100 V • 28.1 W/240 V	• 29.8 W/100 V • 29.0 W/240 V	• 54 W/100 V • 54.4 W/240 V
Standby Power Consumption	• 2.5 W/100 V • 2.5 W/240 V	• 4.3 W/100 V • 5.2 W/240 V	• 19.6 W/100 V • 16.6 W/240 V	• 18.5 W/100 V • 17.1 W/240 V	• 32 W/100 V • 31.6 W/240 V
Acoustics	• 0 dB(A)	• 0 dB(A)	• High speed: 51.7 dB(A) • Low speed: 44.9 dB(A)	• High speed: 51.7 dB(A) • Low speed: 44.9 dB(A)	• High speed: 52.4 dB(A) • Low speed: 47.6 dB(A)
Heat Dissipation	• 279.59 BTU/hr (100 V) • 275.04 BTU/hr (240 V)	• 519.51 BTU/hr (100 V) • 507.23 BTU/hr (240 V)	• 900.36 BTU/hr (100 V) • 844.23 BTU/hr (240 V)	• 1521.99 BTU/hr (100 V) • 1449.49 BTU/hr (240 V)	• 1634.01 BTU/hr (100 V) • 1549.29 BTU/hr (240 V)
Fans	• N/A	• N/A	• 2	• 2	• 3
Operating Temperature	• -5 to 50°C (23 to 122°F)				
Storage Temperature	• -20 to 70°C (-4 to 158°F)				
Operating Humidity	• 0% to 95% relative humidity				
Storage Humidity	• 0% to 95% relative humidity				
Dimensions (L x W x H)	• 280 x 126 x 44 mm (11.02 x 4.96 x 1.73 in)	• 330 x 180 x 44 mm (12.99 x 7.09 x 1.73 in)	• 440 x 250 x 44 mm (17.32 x 9.84 x 1.73 in)	• 440 x 250 x 44 mm (17.32 x 9.84 x 1.73 in)	• 440 x 430 x 44 mm (17.32 x 16.93 x 1.73 in)
Weight	• 0.95 kg (2.10 lbs)	• 1.77 kg (3.90 lbs)	• 3.75 kg (8.27 lbs)	• 3.94 kg (8.69 lbs)	• 6.26 kg (13.80 lbs)
Certifications	• EMI: CE Class A, VCCI Class A, FCC Class A, BSMI, CCC • Safety: CB, UL, BSMI, CCC				
MTBF	• 729,258 hours	• 1,274,005 hours	• 469,262 hours	• 277,967 hours	• 236,406 hours

Software		
L2 Features	<ul style="list-style-type: none"> <li>• MAC Address Table               <ul style="list-style-type: none"> <li>• 8K entries</li> <li>• 16K entries (DGS-1210-52/52MP only)</li> </ul> </li> <li>• IGMP Snooping               <ul style="list-style-type: none"> <li>• IGMP v1/v2 Snooping</li> <li>• IGMP v3 awareness</li> <li>• Supports 256 IGMP groups</li> <li>• Supports at least 64 static multicast addresses</li> <li>• IGMP per VLAN</li> <li>• Supports IGMP Snooping Querier</li> </ul> </li> <li>• Loopback Detection</li> <li>• 802.3ad Link Aggregation:               <ul style="list-style-type: none"> <li>• DGS-1210-10/10P/10MP: Supports maximum 4 groups per device and 8 ports per group</li> <li>• DGS-1210-20/26/28/28P/28MP: Supports maximum 8 groups per device and 8 ports per group</li> <li>• DGS-1210-52/52MP: Supports max 16 groups per device and 8 ports per group</li> </ul> </li> <li>• LLDP</li> </ul>	<ul style="list-style-type: none"> <li>• LLDP-MED</li> <li>• Jumbo Frame               <ul style="list-style-type: none"> <li>• Up to 10,000 bytes</li> </ul> </li> <li>• Spanning Tree Protocol               <ul style="list-style-type: none"> <li>• 802.1D STP</li> <li>• 802.1W RSTP</li> <li>• 802.1s MSTP</li> </ul> </li> <li>• Flow Control               <ul style="list-style-type: none"> <li>• 802.3x Flow Control</li> <li>• HOL Blocking Prevention</li> </ul> </li> <li>• Port Mirroring               <ul style="list-style-type: none"> <li>• One-to-One</li> <li>• Many-to-One</li> <li>• Supports Mirroring for Tx/Rx/Both</li> </ul> </li> <li>• Multicast Filtering               <ul style="list-style-type: none"> <li>• Forwards all unregistered groups</li> <li>• Filters all unregistered groups</li> </ul> </li> <li>• Configurable MDI/MDIX               <ul style="list-style-type: none"> <li>• MLD snooping v1/v2 (256 groups)</li> </ul> </li> </ul>
VLAN	<ul style="list-style-type: none"> <li>• 802.1Q</li> <li>• VLAN Group               <ul style="list-style-type: none"> <li>• Max. 256 static VLAN groups</li> </ul> </li> <li>• Configurable VID from 1 - 4094</li> <li>• Asymmetric VLAN</li> </ul>	<ul style="list-style-type: none"> <li>• Auto Voice VLAN               <ul style="list-style-type: none"> <li>• Max. 10 user-defined OUI</li> <li>• Max. 8 default OUI</li> </ul> </li> <li>• Auto Surveillance VLAN</li> </ul>
Quality of Service (QoS)	<ul style="list-style-type: none"> <li>• 802.1p Quality of Service</li> <li>• 8 queues per port</li> <li>• Queue Handling               <ul style="list-style-type: none"> <li>• Strict</li> <li>• Weighted Round Robin (WRR)</li> </ul> </li> <li>• Bandwidth Control               <ul style="list-style-type: none"> <li>• Port-based (ingress/egress, min granularity 10/100/1000 is 16 Kbps)</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• QoS based on:               <ul style="list-style-type: none"> <li>• 802.1p priority queues</li> <li>• DSCP</li> <li>• MAC address</li> <li>• EtherType</li> <li>• IP address</li> <li>• Protocol type</li> <li>• ToS</li> <li>• IP preference</li> <li>• IPv6 Traffic Class</li> <li>• TCP/UDP port</li> </ul> </li> </ul>
L3 Features	<ul style="list-style-type: none"> <li>• IP interface               <ul style="list-style-type: none"> <li>• Supports 4 interfaces</li> </ul> </li> <li>• IPv6 Neighbor Discovery (ND)</li> </ul>	<ul style="list-style-type: none"> <li>• Static routing               <ul style="list-style-type: none"> <li>• 124 IPv4 static route entries</li> <li>• 50 IPv6 static route entries</li> </ul> </li> </ul>
Access Control List (ACL)	<ul style="list-style-type: none"> <li>• Max. 50 access lists</li> <li>• Max. 768 rules shared by IPv4, MAC, and IPv6</li> <li>• Each rule can only be associated with a single port</li> <li>• ACL based on               <ul style="list-style-type: none"> <li>• MAC address                   <ul style="list-style-type: none"> <li>• 802.1p priority mask</li> <li>• VID mask</li> <li>• Source/destination MAC address mask</li> <li>• EtherType mask</li> </ul> </li> <li>• IP address                   <ul style="list-style-type: none"> <li>• Source/destination IP address mask</li> <li>• DSCP mask</li> <li>• Protocol type mask</li> <li>• TCP/UDP port number mask</li> </ul> </li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• IPv6 address               <ul style="list-style-type: none"> <li>• Source/destination IP address mask</li> <li>• DSCP mask</li> <li>• Protocol type mask</li> <li>• TCP/UDP port number mask</li> <li>• IPv6 traffic class mask</li> </ul> </li> </ul>

Security Features	<ul style="list-style-type: none"> <li>• Broadcast/Multicast/Unicast Storm Control</li> <li>• D-Link Safeguard Engine</li> <li>• Traffic segmentation</li> <li>• SSH v2</li> <li>• TLS v.1.2</li> <li>• DoS attack prevention</li> <li>• 802.1X Port-based Access Control</li> <li>• Port Security <ul style="list-style-type: none"> <li>• Supports up to 64 MAC addresses per port</li> </ul> </li> <li>• ARP Spoofing Prevention <ul style="list-style-type: none"> <li>• Max. 127 entries</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• DHCP Server Screening</li> <li>• IP-MAC-Port Binding (Smart Binding) <ul style="list-style-type: none"> <li>• ARP Inspection <ul style="list-style-type: none"> <li>• Max. 256 entries</li> </ul> </li> <li>• IPv4 Inspection <ul style="list-style-type: none"> <li>• Max. 127 entries</li> </ul> </li> <li>• IPv6 Inspection <ul style="list-style-type: none"> <li>• Max. 63 entries</li> </ul> </li> </ul> </li> <li>• DHCP Snooping <ul style="list-style-type: none"> <li>• Max. 512 entries</li> </ul> </li> </ul>
AAA	<ul style="list-style-type: none"> <li>• 802.1X Authentication <ul style="list-style-type: none"> <li>• Supports local/RADIUS database</li> <li>• Supports port-based access control</li> <li>• Supports EAP, OTP, TLS, TTLS, PEAP</li> <li>• Max. 128 entries when using local database</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• IPv6 RADIUS server</li> <li>• Support MD5 authentication</li> </ul>
OAM	<ul style="list-style-type: none"> <li>• Cable diagnostics</li> </ul>	<ul style="list-style-type: none"> <li>• Factory reset</li> </ul>
Management	<ul style="list-style-type: none"> <li>• Web-based GUI</li> <li>• D-Link Network Assistant Utility</li> <li>• Compact CLI</li> <li>• Telnet Server</li> <li>• TFTP Client</li> <li>• Configurable MDI/MDIX</li> <li>• SNMP <ul style="list-style-type: none"> <li>• Supports v1/v2c/v3</li> </ul> </li> <li>• SNMP Trap</li> <li>• Backup/upgrade firmware</li> <li>• Smart Wizard</li> <li>• Upload/download configuration file</li> <li>• BootP/DHCP Client</li> </ul>	<ul style="list-style-type: none"> <li>• System Log <ul style="list-style-type: none"> <li>• Max. 500 log entries</li> </ul> </li> <li>• SNMP</li> <li>• ICMP v6</li> <li>• IPv4/v6 Dual Stack</li> <li>• DHCP Auto Configuration</li> <li>• Time setting <ul style="list-style-type: none"> <li>• SNMP</li> </ul> </li> <li>• RMONv1</li> <li>• Trusted host</li> <li>• Dual image</li> <li>• Dual configuration</li> </ul>
Green V3.0 Technology	<ul style="list-style-type: none"> <li>• Power Saving by: <ul style="list-style-type: none"> <li>• Link Status</li> <li>• Time-based PoE: PoE ports can be turned on/off by port or system through schedule</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• System hibernation</li> <li>• Port shut off</li> <li>• Cable length detection</li> </ul>
MIBs	<ul style="list-style-type: none"> <li>• RFC1212 Concise MIB Definitions</li> <li>• RFC1213 MIBII</li> <li>• RFC1215 MIB Traps Convention</li> <li>• RFC1493 Bridge MIB</li> <li>• RFC1157, RFC2573, RFC2575, RFC2576 SNMP MIB</li> <li>• RFC1442, RFC1901, RFC1902, RFC1903, RFC1904, RFC1905, RFC1906, RFC1907, RFC1908, RFC2578, RFC3418 SNMPv2 MIB</li> <li>• RFC271, RFC1757, RFC2819 RMON MIB</li> <li>• RFC2021 RMONv2 MIB</li> <li>• RFC1398, RFC1643, RFC1650, RFC2358, RFC2665 Ether-like MIB</li> </ul>	<ul style="list-style-type: none"> <li>• RFC2674 802.1p MIB</li> <li>• Interface Group MIB</li> <li>• RFC2618 RADIUS Authentication Client MIB</li> <li>• RFC4022 MIB for TCP</li> <li>• RFC4113 MIB for UDP</li> <li>• RFC2389 MIB for Diffserv.</li> <li>• RFC2620 RADIUS Accounting Client MIB</li> <li>• Private MIB</li> <li>• PoE MIB</li> <li>• DDP MIB</li> <li>• LLDP-MED MIB</li> </ul>
RFC Standards	<ul style="list-style-type: none"> <li>• RFC791 IP</li> <li>• RFC768 UDP</li> <li>• RFC793 TCP</li> <li>• RFC792 ICMPv4</li> <li>• RFC2463, RFC4443 ICMPv6</li> <li>• RFC826 ARP</li> <li>• RFC1321, RFC2284, RFC2865, RFC2716, RFC3580 Extensible Authentication Protocol (EAP)</li> </ul>	<ul style="list-style-type: none"> <li>• RFC2573 SNMP Applications</li> <li>• RFC2461, RFC4861 Neighbor Discovery for IPv6</li> <li>• RFC2462, RFC4862 IPv6 Stateless Address Auto-configuration (SLAAC)</li> <li>• RFC2464 IPv6 over Ethernet and definition</li> <li>• RFC4291 IPv6 Addressing Architecture</li> <li>• RFC2893, RFC4213 IPv4/IPv6 dual stack function</li> </ul>

Order Information	
DGS-1210-10	8 10/100/1000 Mbps ports and 2 100/1000 Mbps SFP ports
DGS-1210-10P	8 10/100/1000 Mbps PoE ports and 2 100/1000 Mbps SFP ports
DGS-1210-10MP	8 10/100/1000 Mbps PoE ports and 2 100/1000 Mbps SFP ports
DGS-1210-20	16 10/100/1000 Mbps ports and 4 100 Mbps/1 Gbps combo ports
DGS-1210-26	24 10/100/1000 Mbps ports and 2 100 Mbps/1 Gbps SFP ports
DGS-1210-28	24 10/100/1000 Mbps ports and 4 100 Mbps/1 Gbps combo ports
DGS-1210-28P	24 10/100/1000 Mbps PoE ports and 4 100 Mbps/1 Gbps combo ports
DGS-1210-28MP	24 10/100/1000 Mbps PoE ports and 4 100 Mbps/1 Gbps combo ports
DGS-1210-52MP	48 10/100/1000 Mbps PoE ports and 4 100 Mbps/1 Gbps combo ports
DGS-1210-52	48 10/100/1000 Mbps ports and 4 100 Mbps/1 Gbps combo ports
Optional SFP Transceivers	
DGS-712	1000BASE-T copper
DEM-302S-LX	1000BASE-LX, single-mode, 2 km
DEM-302S-BXD/BXU	Gigabit WDM transceiver, single-mode, 2 km
DEM-310GT	1000BASE-LX, single-mode, 10 km
DEM-311GT	1000BASE-SX, multi-mode, 550 m
DEM-312GT2	1000BASE-SX, multi-mode, 2 km
DEM-314GT	1000BASE-LHX, single-mode, 50 km
DEM-315GT	100BASE-ZX, single-mode, 80 km
DEM-330T/R	Gigabit WDM transceiver, single-mode 10 km
DEM-331T/R	Gigabit WDM transceiver, single-mode 40 km
DEM-210	100BASE-FX, single-mode, 15 km
DEM-211	100BASE-FX, multi-mode, 2 km

# DGS-1210 Series Smart Managed Switches

DEM-220T/R	Fast Ethernet WDM transceiver, single-mode, 20 km
D-View 7 Order Information	
<i>Part Number</i>	<i>Description</i>
DV-700-N25-LIC	D-View 7 - 25 node license
DV-700-N50-LIC	D-View 7 - 50 node license
DV-700-N100-LIC	D-View 7 - 100 node license
DV-700-N250-LIC	D-View 7 - 250 node license
DV-700-N500-LIC	D-View 7 - 500 node license
DV-700-N1000-LIC	D-View 7 - 1000 node license
DV-700-P5-LIC	D-View 7 - 5 probe license
DV-700-P10-LIC	D-View 7 - 10 probe license
DV-700-P25-LIC	D-View 7 - 25 probe license
DV-700-P50-LIC	D-View 7 - 50 probe license
DV-700-P100-LIC	D-View 7 - 100 probe license

Updated 2018/03/15